


Our Original PowerCore Brand is Changing!

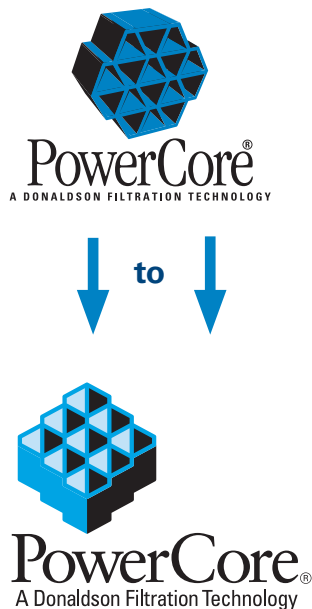

Section Index

PSD.....	30
Scavenge System Components	38
PowerCore Air Cleaners for Cummins® Engines	43
Ford 7.3L Retrofit Kit	44


Our PowerCore® air cleaners deliver . . .

- System design flexibility
- Metal-free, lightweight materials
- Rugged construction
- Straight-through airflow technology invented by Donaldson
- Advanced sealing technology
- 3x more efficient than the average Axial pleated filter
- RadialSeal™ advanced sealing technology
- Inertial particle separation technology


This new air cleaner family offers two-stage filtration in a single, compact unit that delivers superior filtration performance using our PowerCore Filtration Technology.

For greater filtration, our PSD air cleaners are adaptable to a scavenged air system.


PowerCore® Straight-Through Airflow Schematic

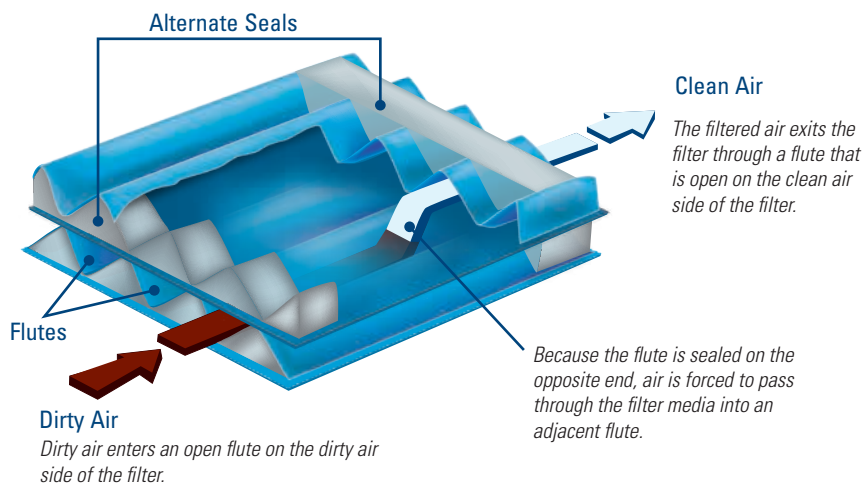

Dust Holding Capacity

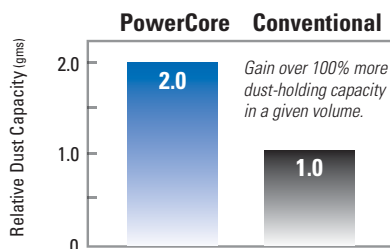

Overall Efficiency



Cummins is a registered trademark of Cummins Filtration, Inc.



Millions of PowerCore® Filters Installed on Original Equipment



PowerCore
A Donaldson Filtration Technology

This air cleaner family offers two-stage filtration in a single, compact unit that delivers superior filtration performance using our PowerCore® Filtration Technology.


This non-metal air cleaner (except for cover clamps) is ideal for equipment operating in medium to heavy dust environments.

Applications

- Off-road equipment operating in medium to heavy dust conditions with engine airflow ranges up to 1490 cfm
- Scavenged system components — exhaust ejectors and check valves — now available. See page 38 for more details.
- Obround housing shape allows for a narrow or wide mounting orientation.
- Models have either end or side filter service access
- Sustained temperature tolerance: -40 °F to 180 °F / -40 °C to 82 °C


Service Access on Inlet End — PSD08

Exploded view of D080020

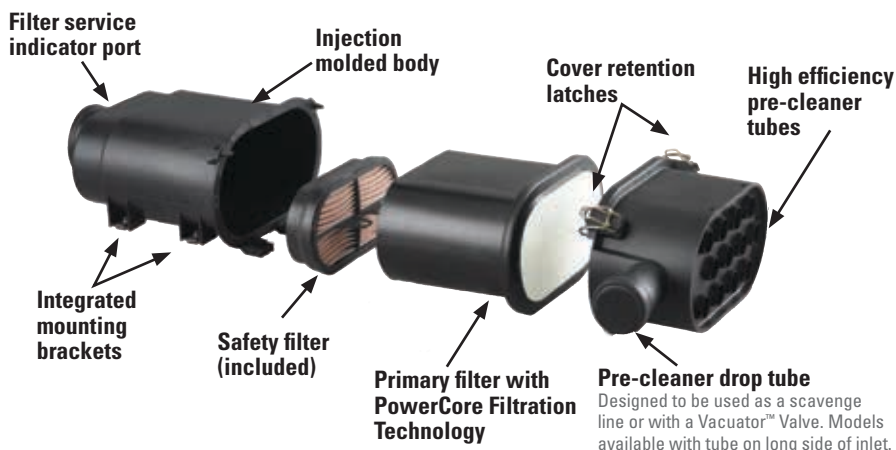

Service Access on Side — PSD08, PSD09, PSD10, PSD12 and PSD14

Exploded view of D090073

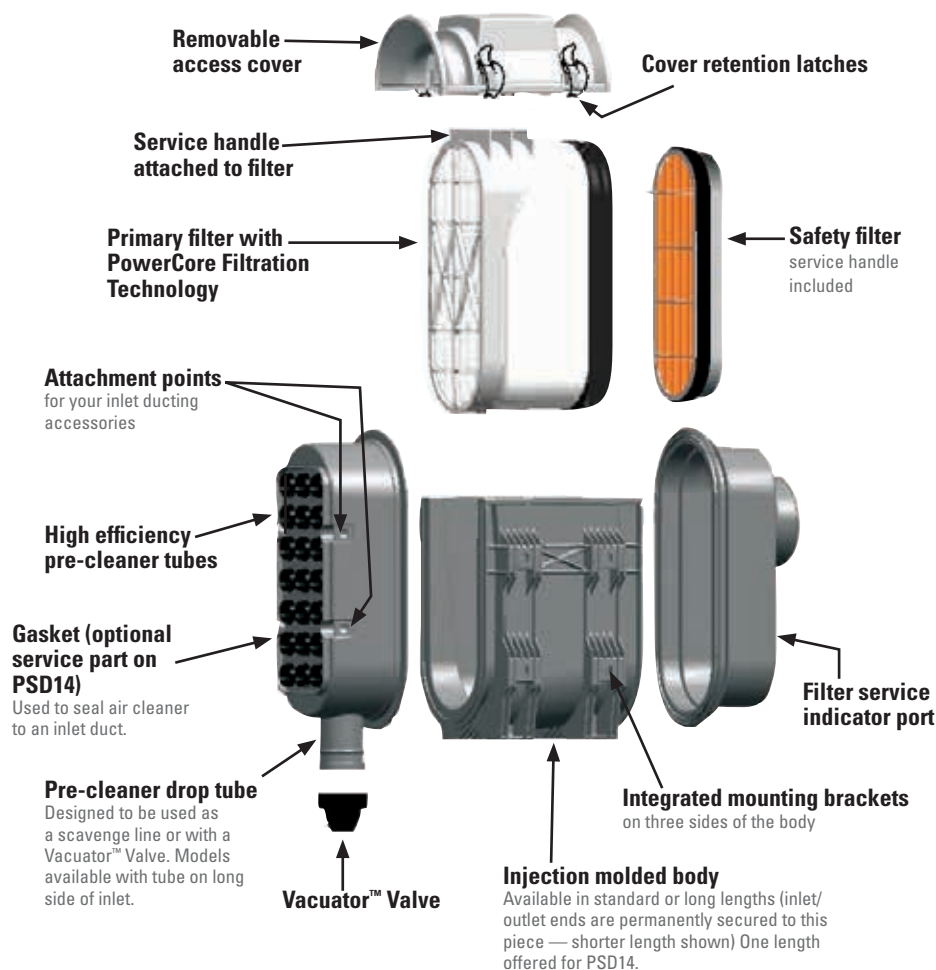

Excellent Performance in Half the Space

Features

- More compact at a given performance level than standard pleated filters
- Non-metal filters
- Improved engine protection: no media movement, expansion, contraction or bunching
- Improved contaminant encapsulation: dust and dirt stay contained in filter during service
- High efficiency integrated pre-cleaner improves filter life
- Improved handling and maintenance: lighter and smaller, changing filters is a snap
- Easily serviced; no tools required to remove or replace cover
- Can be used with scavenge line or Vacuator™ Valve
- Built in mounting brackets eliminate the need to purchase separate mounting bands



The filter on the side-service access models can be easily removed with the built-in grab handle.



A PSD10 mounted horizontally was the equipment manufacturer's choice on this diesel-powered (285 HP @ 2,000 RPM) feller buncher.



D080020 — Horizontal



D080056 — Vertical

Mounting Flexibility

With mounting locations on three sides of the housing (exception D080020 & D080026) and two separate drop tube orientations, the PSD series offers the greatest amount of flexibility for a wide variety of installations.

U-clips are shipped with each air cleaner. Affix these to the mounting location (all in the same direction) and slide the housing into place. See dimensional illustration for u-clip mounting hole pattern on pages 35, 36 and 37.



The air cleaner is not to be mounted using U-clips on both sides adjacent to the access cover. Fixation Points use M8 fasteners. Maximum torque is 18 N•m.

The PSD14 air cleaner MUST be mounted with nine U-clips — four on the side opposite the access cover and all five U-Clips on ONE of the two sides.



D090120 — Horizontal




D090073 — Vertical



D100072 — Horizontal



D140078 — Vertical

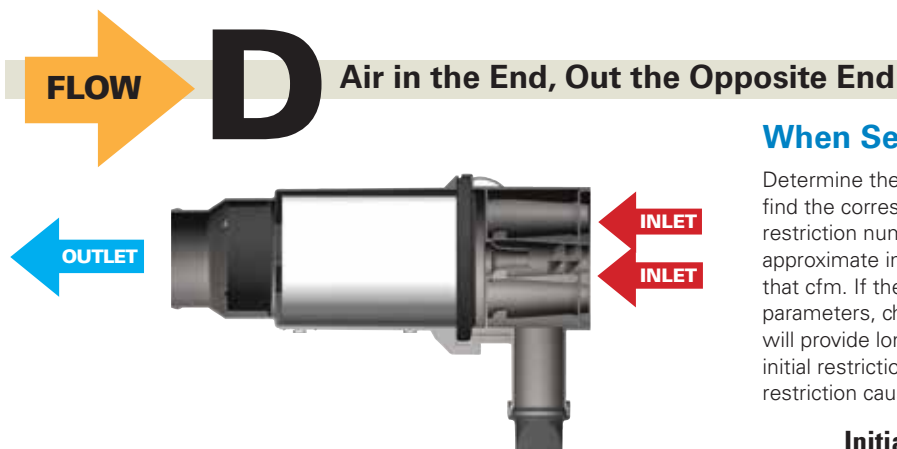

When Selecting an Air Cleaner . . .

Determine the airflow requirements of your engine, then find the corresponding cfm airflow in the table below. The restriction numbers (shown in inches of water) indicate the approximate initial restriction of each model air cleaner at that cfm. If there are two air cleaner models that fit your parameters, choosing the one with the lower restriction will provide longer filter service life. When calculating total initial restriction of the entire air intake system, include the restriction caused by ducting, elbows, and pre-cleaners.

Initial Airflow Restriction (non-scavenged)

6"	CFM @ "H ₂ O	8"	10"	Air Cleaner Model
MODELS WITH SERVICE ACCESS ON END				
176	206	232		D080020
176	206	232		D080026
MODELS WITH SERVICE ACCESS ON SIDE				
180	216	245		D080056
267	315	357		D090055
284	329	370		D090101
284	329	370		D090121
293	345	391		D090073
293	345	391		D090120
500	580	652		D100029
500	580	652		D100030
500	580	652		D100072
532	622	700		D100031
532	622	700		D100032
532	622	700		D100068
700	810	915		D120035
700	810	915		D120036
700	810	915		D120037
700	810	915		D120038
1133	1323	1490		D140078
1133	1323	1490		D140079

PSD Air Cleaners and Scavenge Air Systems

PSD air cleaners are designed to operate with or without aspiration, otherwise known as scavenging. PSD performance charts are provided for both non-scavenged and scavenged.



The advantages to scavenging are:

- Higher pre-cleaner efficiency (resulting in longer filter service life)
- Completely self-servicing (no regular maintenance needed on pre-cleaner)







Aspirating an intake system through the use of a scavenging device adds more components (an ejector and some plumbing) to the overall system, but will enhance the separator efficiency of the pre-cleaner and consequently extend the filter service life.

The PSD air cleaner and pre-cleaner will function adequately without scavenge — the result is less filter service life than with scavenging. However, it is recommended to use a scavenge system for horizontally mounted PSD12 and PSD14 applications.

PSD Air Cleaner Performance Curves

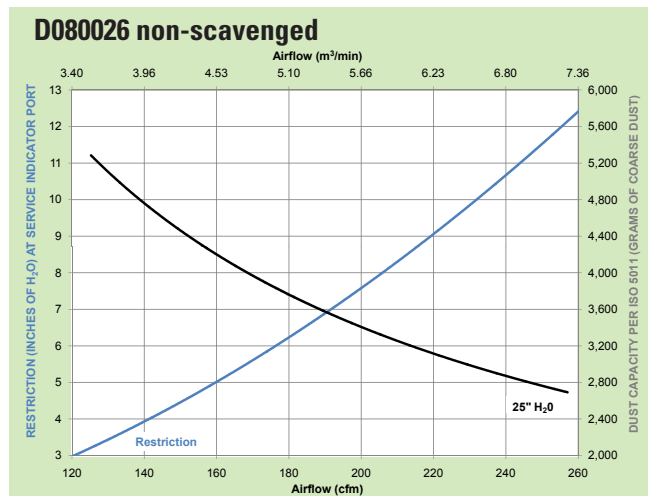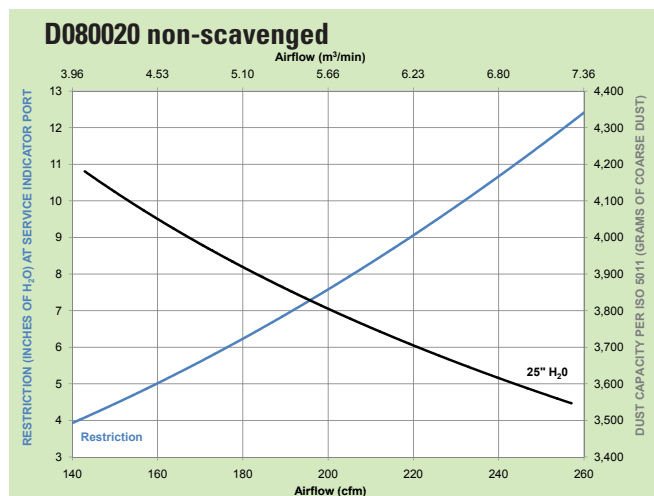


continued — PSD Air Cleaner Performance Curves

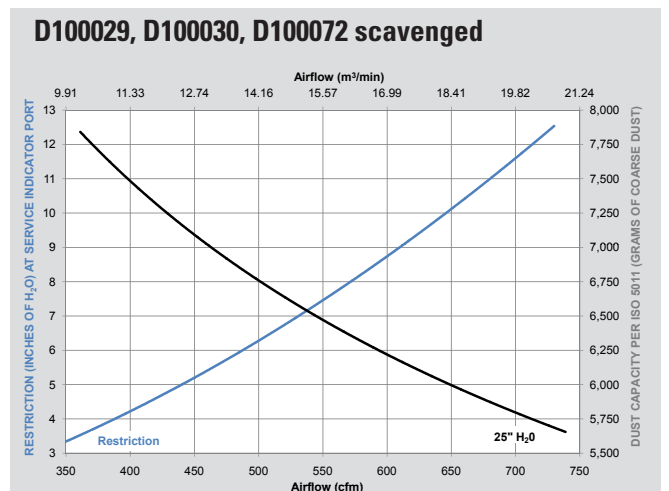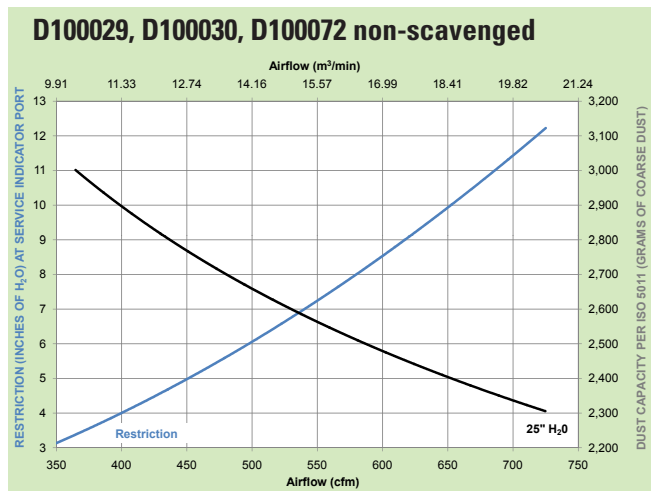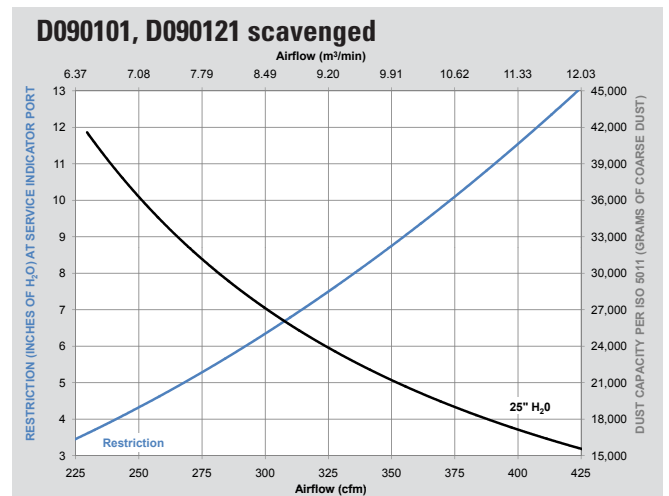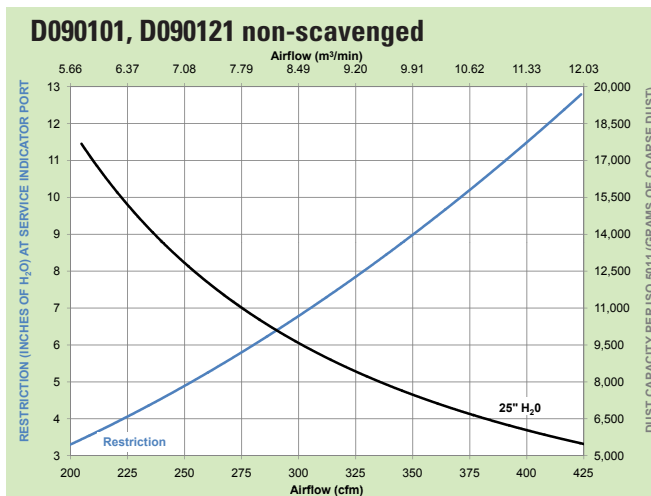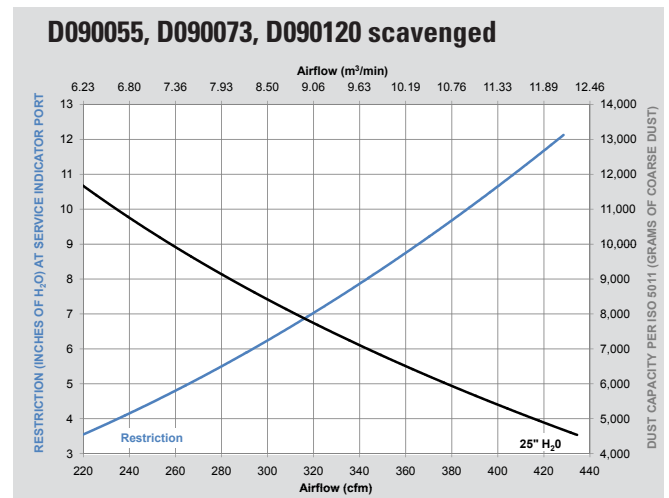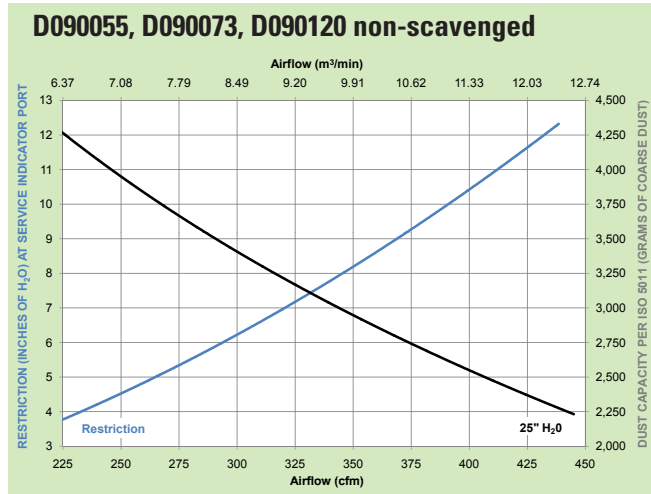




continued — PSD Air Cleaner Performance Curves


D100031, D100032, D100068 non-scavenged

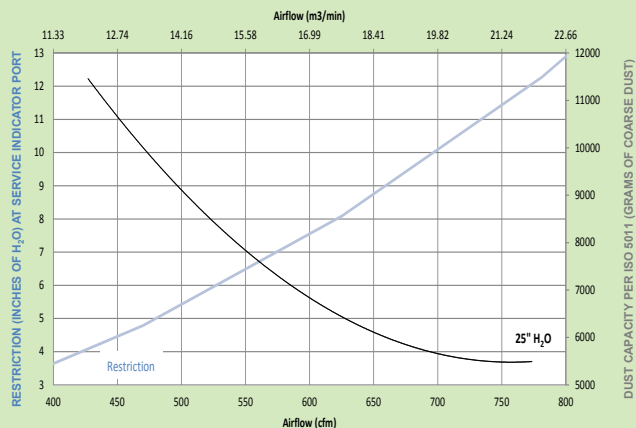


D100031, D100032, D100068 scavenged

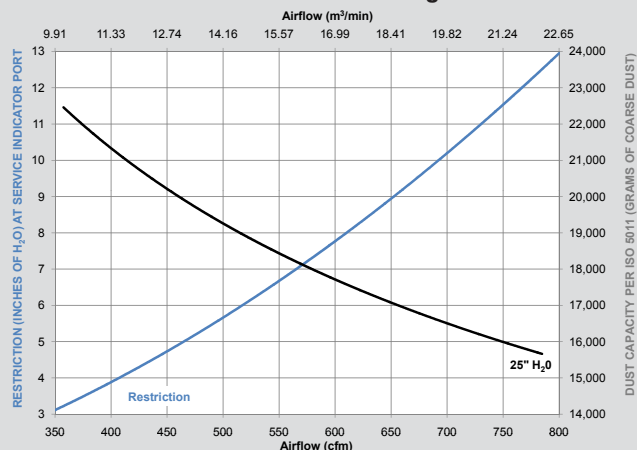


D120035, D120036 non-scavenged

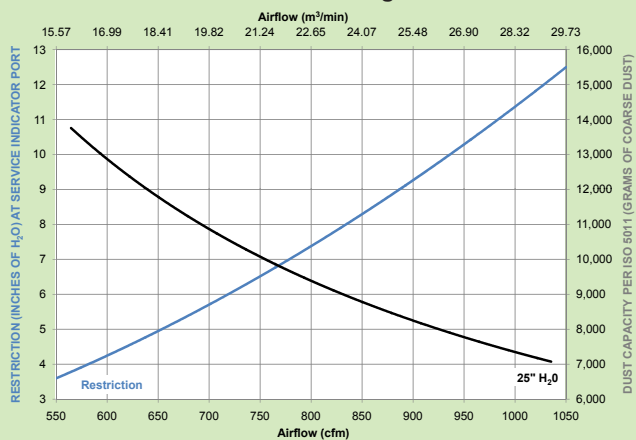


D120035 & D120036 scavenged

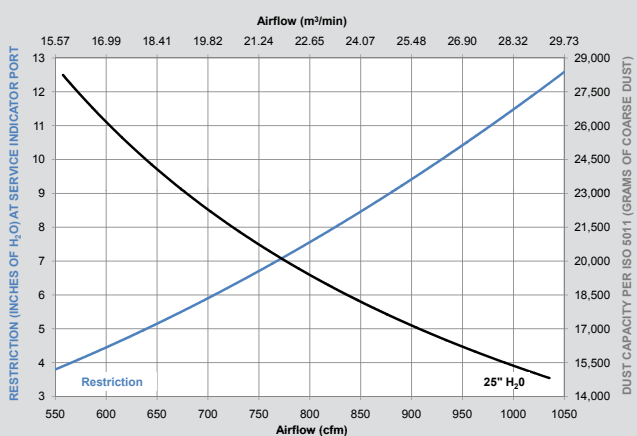



D120037, D120038 non-scavenged

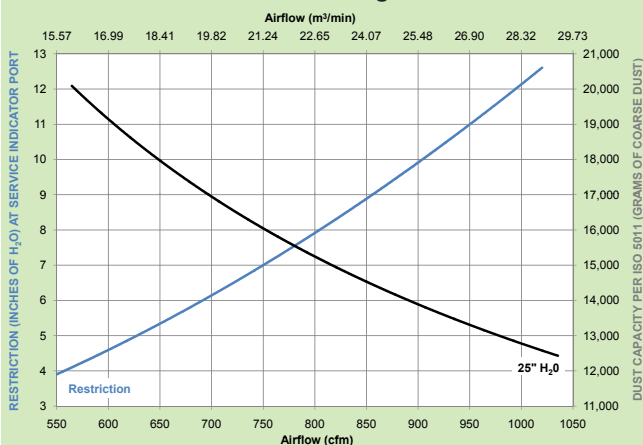

D120037 & D120038 scavenged

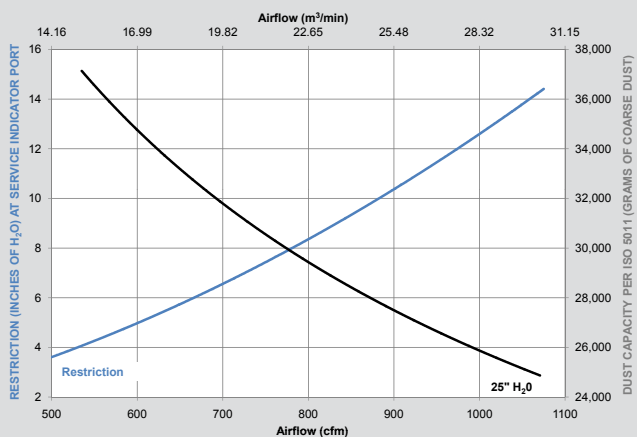


continued — PSD Air Cleaner Performance Curves

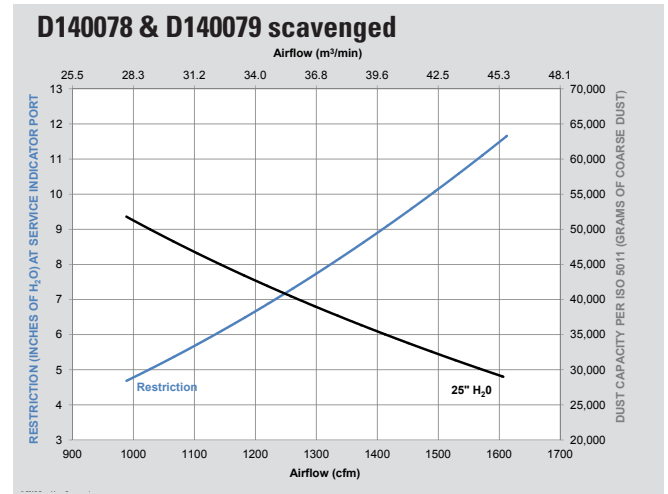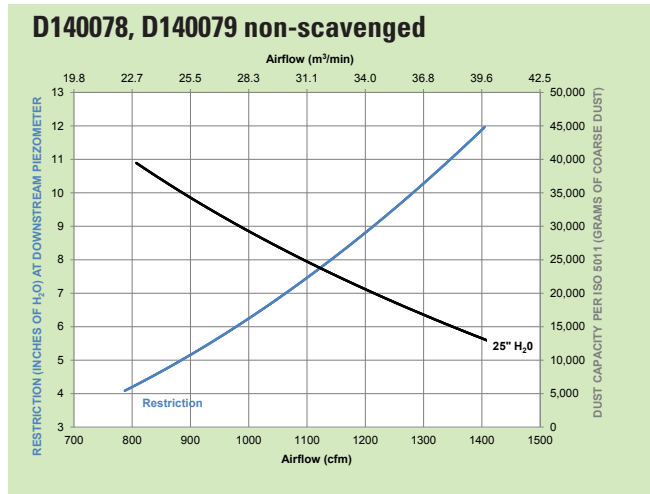

PSD Specification Illustrations

PSD08 Models — Service Access on End (Vertical Model Shown)

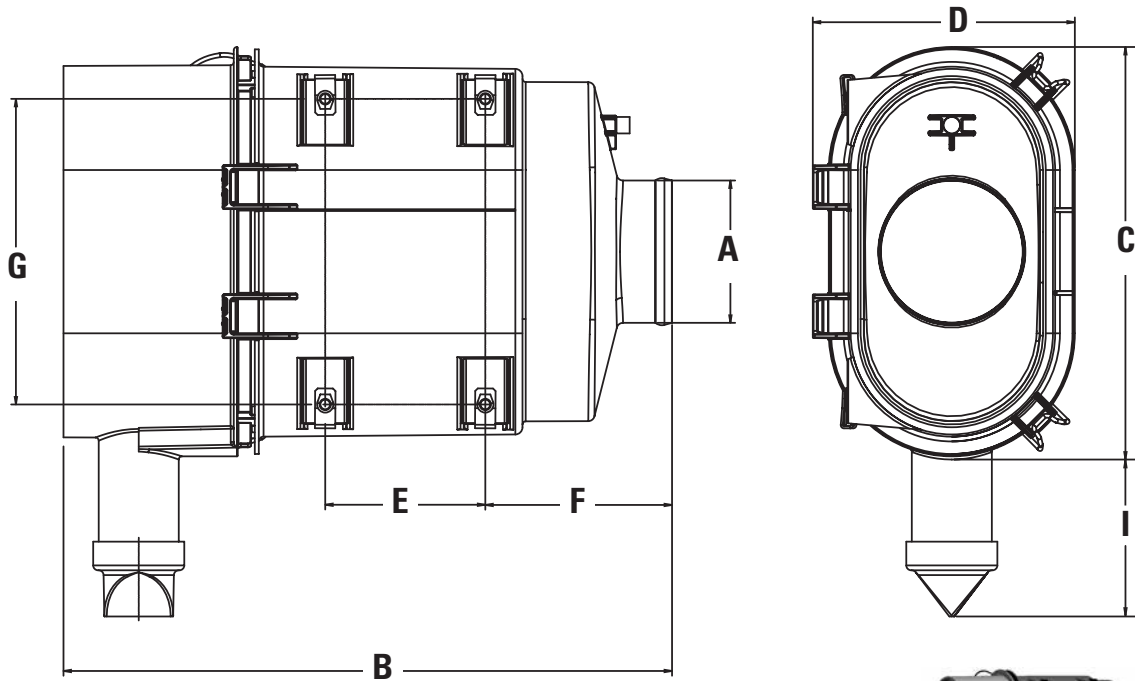

D080020 — Horizontal



D080026 — Vertical


PSD Specifications (Letters are keyed to drawings)

Orientation: H=Horizontal; V=Vertical

Part No. / Orientation	A		B		C		D		E		F		G		I		Weight		
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs	
MODELS WITH SERVICE ACCESS ON END																			
D080020	H	89	3.50	380	14.97	256	10.07	154	6.05	100	3.94	117	4.59	191	7.50	98	3.87	2.2	4.8
D080026	V	89	3.50	380	14.97	256	10.07	154	6.05	100	3.94	117	4.59	191	7.50	98	3.87	2.2	4.8



PSD08, PSD09, PSD10, PSD12 — Service Access on Side (Vertical Model Shown)

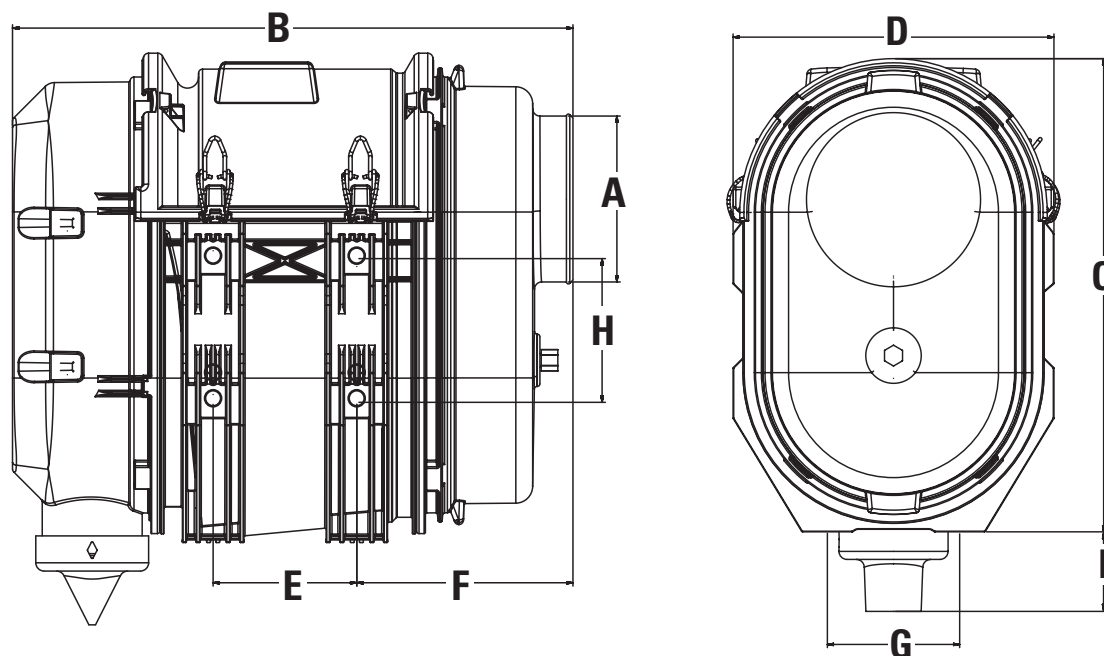

D080056 — Vertical



D090120 — Horizontal



D100029 — Vertical

PSD Specifications (Letters are keyed to drawings)


Orientation: H=Horizontal; V=Vertical

Part No. / Orientation	A		B		C		D		E		F		G		H		I		Weight		
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs	
MODELS WITH SERVICE ACCESS ON SIDE																					
D080056	V	89	3.50	370	14.55	247	9.70	180	7.09	69	2.72	142	5.60	118	4.65	75	2.95	51.9	2.04	2.2	4.9
D090073	V	102	4.00	433	17.05	362	14.25	180	7.09	110	4.33	174	6.85	100	3.94	130	5.12	72	2.85	3.7	8.1
D090101	V	102	4.00	533	20.98	363	14.29	180	7.09	180	7.09	183	7.21	100	3.94	130	5.12	70	2.75	4.3	9.5
D090120	H	102	4.00	433	17.05	360	14.17	180	7.09	110	4.33	174	6.85	110	4.32	130	5.12	60	2.36	3.7	8.1
D090121	H	102	4.00	533	20.98	363	14.29	180	7.09	180	7.09	183	7.21	110	4.32	130	5.12	60	2.36	4.3	9.5
D090055**	H	102	4.00	432	17.00	363	14.31	180	7.09	110	4.33	173	6.83	100	3.94	130	5.12	68	2.68	5.0	11.0
D100029	V	127	5.00	429	16.90	374	14.74	254	10.01	110	4.33	165	6.50	110	4.33	110	4.33	63	2.48	5.3	11.7
D100030*	H	127	5.00	429	16.90	374	14.74	254	10.01	110	4.33	165	6.50	110	4.33	110	4.33	70	2.76	5.3	11.7
D100031	V	152	6.00	529	20.84	384	15.12	254	10.01	210	8.27	165	6.50	110	4.33	110	4.33	54	2.12	6.1	13.4
D100032*	H	152	6.00	529	20.84	384	15.12	254	10.01	210	8.27	165	6.50	110	4.33	110	4.33	70	2.76	6.1	13.4
D100068	H	152	6.00	529	20.84	384	15.12	254	10.01	210	8.27	165	6.50	110	4.33	110	4.33	70	2.76	6.1	13.4
D100072	H	127	5.00	429	16.90	374	14.74	254	10.01	110	4.33	165	6.50	110	4.33	110	4.33	70	2.76	5.3	11.7
D120035	V	152	6.00	496	19.53	430	16.93	306	12.04	168	6.62	160	6.30	154	6.08	110	4.33	68	2.68	7.0	15.5
D120036	H	152	6.00	496	19.53	430	16.93	306	12.04	168	6.62	160	6.30	154	6.08	110	4.33	68	2.68	7.0	15.5
D120037	V	152	6.00	596	23.46	441	17.36	306	12.04	268	10.56	160	6.30	154	6.08	110	4.33	68	2.68	7.9	17.4
D120038	H	152	6.00	596	23.46	441	17.36	306	12.04	268	10.56	160	6.30	154	6.08	110	4.33	68	2.68	7.9	17.4

* Access cover and outlet tube rotated 180° compared to view shown in the D100072 photo above.

** Access cover rotated 180° compared to view shown in the D100120 photo above.

PSD14 — Service Access on Side (Vertical Model Shown)

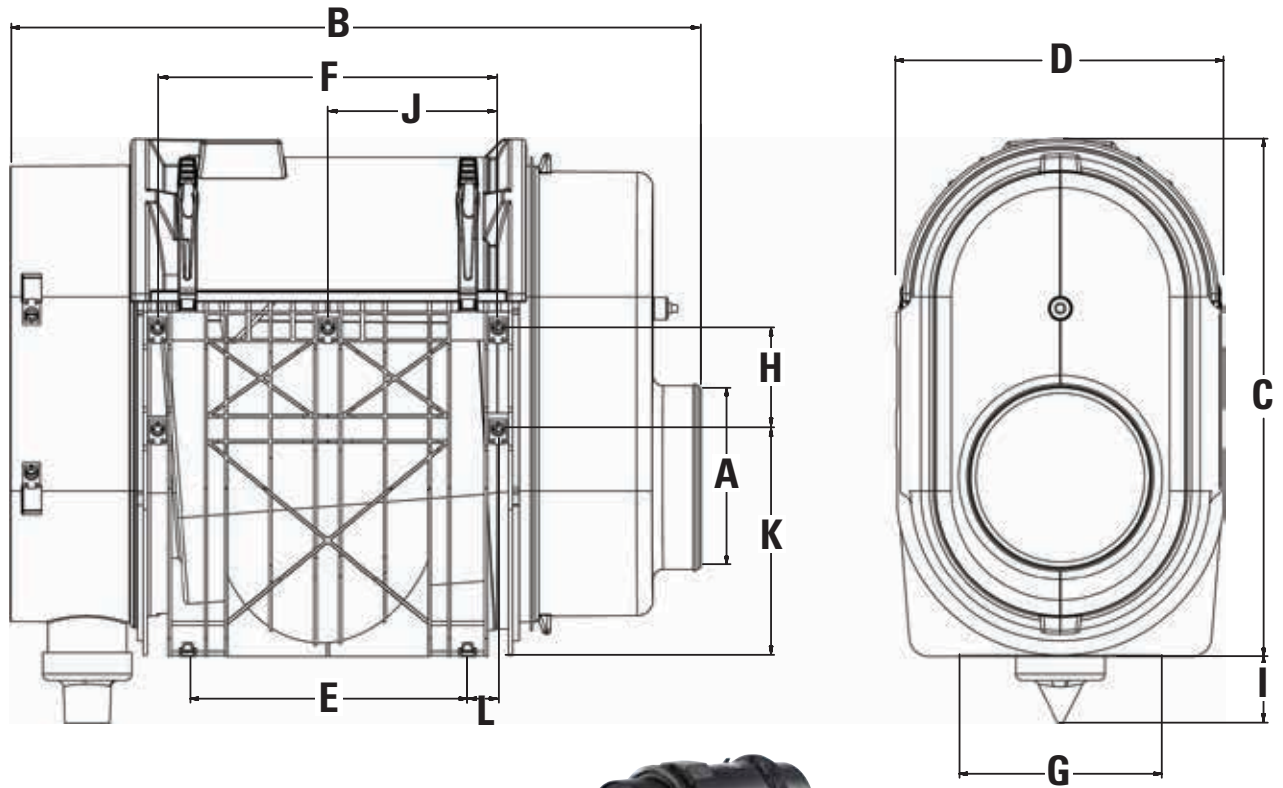

The PSD14 air cleaner MUST be mounted with nine U-clips — four on the side opposite the access cover and all five U-Clips on ONE of the two sides.

D140078 — Vertical

PSD14 Specifications (Letters are keyed to drawings)

Orientation: H=Horizontal; V=Vertical

Part No. / Orientation	A mm/in	B mm/in	C mm/in	D mm/in	E mm/in	F mm/in	G mm/in	H mm/in	I mm/in	J mm/in	K mm/in	L mm/in	Weight kg/lbs
MODELS WITH SERVICE ACCESS ON SIDE													
D140078 V	178/7.00	670/26.37	501/19.71	318/12.52	272/10.68	330/13.0	230/9.00	98/4.59	65/2.53	165/6.5	222/8.75	29/1.2	11.4/25.0
D140079 H	178/7.00	670/26.37	501/19.71	318/12.52	272/10.68	330/13.0	230/9.00	98/4.59	66/2.60	165/6.5	222/8.75	29/1.2	11.4/25.0




Scavenge System Components

Scavenging is accomplished by introducing a secondary airflow to the drop tube on the air cleaner — generally through the use of an ejector or ejector muffler (see illustration on right). This flow pulls the separated contaminant from the pre-cleaner and inserts it into the exhaust stream.

Exhaust ejectors (below), adapters, and check valves (next page) complement the PSD air cleaner product offering.

Illustration of Scavenge Connection with PSD10 Horizontal Model

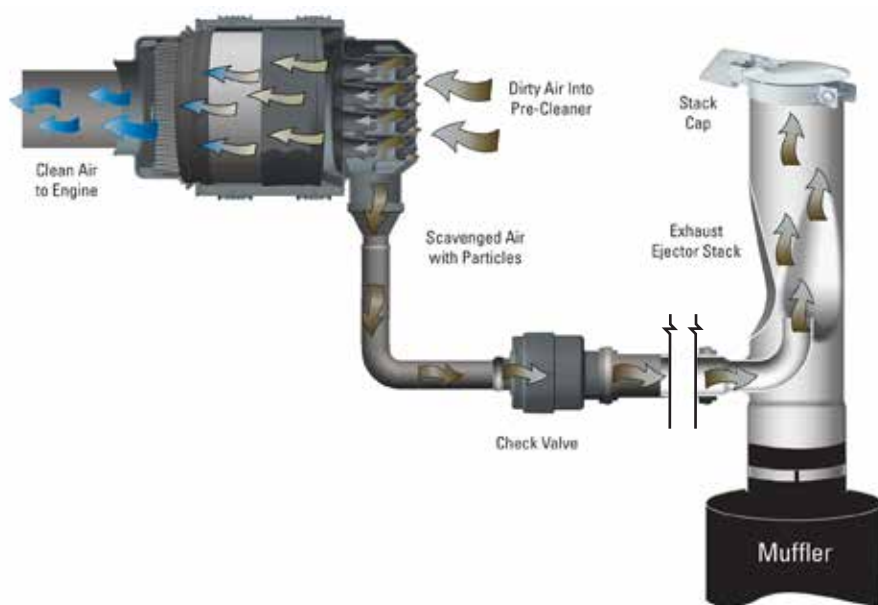

Exhaust Ejectors

All exhaust ejectors are constructed of heavy-gauge, aluminized steel and painted with high-temperature black paint. Select the appropriate ejector by the intake airflow or exhaust flow (CFM) of your engine. These same parts and more information on ejectors can be found in the accessories section of this product guide.

Engine Intake CFM		Exhaust CFM @ 900 °F		Standard Ejectors			Expanded I.D. Ejectors			Length		Scavenge Tube O.D.	
Low	High	Low	High	Inlet Dia.* inches	mm	Part Number	Inlet Dia.* inches	mm	Part Number	inches	mm	inches	mm
220	365	554	919	3.02	77.0	H002612	3.16	80.3	H002762	12.00	304.8	1.25	32
315	450	793	1133	4.02	102.0	H002613	4.17	105.9	H002763	18.00	457.2	1.25	32
425	600	1070	1511	4.02	102.0	H002614	4.17	105.9	H002764	18.00	457.2	1.50	38
500	740	1259	1864	5.03	127.8	H002615	5.17	131.0	H002765	22.00	558.8	1.50	38
660	950	1662	2393	5.03	127.8	H002616	5.17	131.0	H002766	22.00	558.8	1.75	44
800	1150	2015	2896	6.04	153.4	H002617	6.19	157.0	H002767	24.00	609.6	2.00	51
950	1350	2393	3400	6.04	153.4	H002618	6.19	157.0	H002768	24.00	609.6	2.00	51
1100	1500	2770	3778	6.04	153.4	H002619	6.19	157.0	H002769	24.00	609.6	2.00	51

Scavenge Adapters



Straight Adapter




90° Adapter

Part Number	Adapter Type	Outlet Dia.		Diameter		Height	
		inches	mm	inches	mm	inches	mm
P783746	3" TO 1.50" STRAIGHT	1.50	38	3.00	78	2.68	68
P783747	3" TO 1.25" STRAIGHT	1.25	32	3.00	78	2.68	68
P783748	3" TO 2.00" STRAIGHT	2.00	50	3.00	78	2.68	68
P784019	3" TO 1.25" 90 DEGREE	1.25	32	3.00	78	2.68	68
P617276	3" TO 2.00" 90 DEGREE	2.00	50	3.00	78	2.20	56


Check Valve Operation and Orientation

- Prevents back flow of exhaust gas into pre-cleaner
- For proper installation, it is important that the index is installed upward and horizontal with no more than a 20° variation. See below.
- Install inline check valve as close as possible to the air cleaner
- Temperature resistance of 200 °C / 400 °F

Part Number	Inlet Dia.		Outlet Dia.		Length		Body Dia.	
	inches	mm	inches	mm	inches	mm	inches	mm
P786337	1.25	32	1.25	32	4.45	113	2.80	71
P786340	1.50	38	1.50	38	4.45	113	2.80	71
P786343	2.00	50	2.00	50	4.45	113	2.80	71

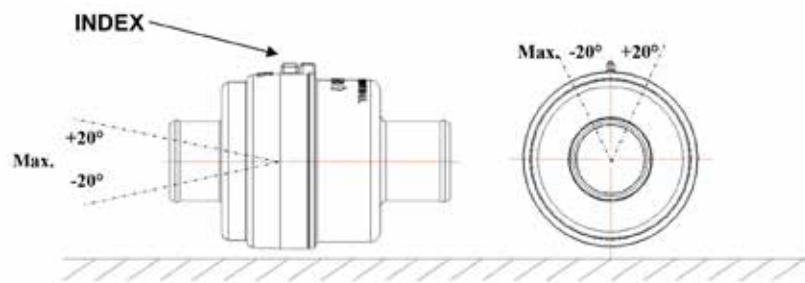

Scavenge flow direction

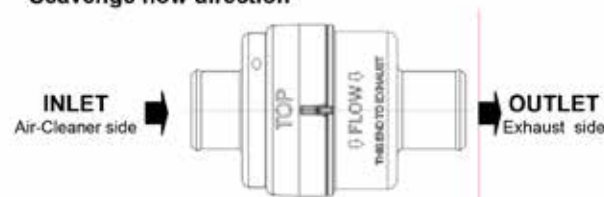



This servicing information is provided as a best practices guide. It is not intended to replace or supersede the service instructions supplied by your engine or vehicle manufacturer. Note: Your air cleaner service cover may be in a different position than shown.

1 Check the Restriction

Replace the filter only when the restriction level has reached the maximum recommended by the engine or equipment manufacturer or on a regular scheduled service.



2 Check Vacuator™ Valve & Pre-Cleaner Tubes

Shut off the engine. Inspect the Vacuator™ Valve (or scavenge line) for damage. If damaged, replace. If plugged or full of contaminant, check the pre-cleaner tubes, which should be free of contaminant. If plugged or excess contaminant is visible, the pre-cleaner tubes will need to be cleaned.

To clean the pre-cleaner tubes, remove the housing service cover and Vacuator Valve and leave the filter installed (to avoid dust from entering the air induction outlet). Use a low-volume of compressed air to gently blow out the separator tubes. The compressed air can be pushed through both sides of the tubes AND from the drop tube where the Vacuator Valve attaches.

If compressed air is not available or the use of compressed air was not effective due to dried contaminant within the housing, remove the air cleaner from the machine, cover the air intake pipe to prevent contaminant. Remove the primary and secondary filters and Vacuator Valve. Use a low pressure water (e.g., garden hose) to clean the tubes and inside of housing. Direct the flow of water through the separator tubes from both ends and repeat as needed to clean out the housing. Spray out the Vacuator Valve port, alternating between it and the separator tubes. Make sure that all internal housing surfaces are dry prior to reinstalling the filters, Vacuator Valve, and unit on the machine.



NEVER use a pressure sprayer to clean out the air cleaner housing while it is installed on the machine. Avoid using excessive pressure when spraying out the separator tubes as damage can occur.

3 Remove the Primary Filter

For end service pull the filter out of the housing.

For side service push down on the service handle to tilt the filter to a 5° angle. This will loosen the seal. Then, pull up on the service handle to remove the filter from the housing.



4 Visually Inspect the Safety Filter

Remove any excess dirt and wipe out the housing with a damp cloth before servicing the safety filter. Visually inspect the safety filter but do not remove it unless it is damaged or due for change-out. Verify that the safety filter is properly seated in the housing. The safety filter should be replaced every three primary filter changes.



The safety filter should be replaced every three primary filter changes.

5 Remove Safety Filter if Indicated or if Excessively Contaminated

To remove the safety filter, use the plastic handle on the face of the safety filter. Pull the filter toward the center of the housing and remove it. Ensure that the outlet tube sealing area is clean and undamaged. If the safety filter is removed and the new filter is not to be installed immediately, be sure to cover the seal tube with a cloth so that dirt is not admitted. After removing the safety filter, wipe the air cleaner housing interior and seal surfaces with a clean, damp cloth.



6

Inspect the New Filters

Visually check for cuts, tears or indentations on the sealing surfaces and the media pack before installation. If any damage is visible, do not install.



7

Replace the Safety Filter

If replacing the safety filter, use the plastic handle. Slide the filter at an angle into the outlet side and push it in place until the filter seats firmly and evenly within the housing.

On side-service access models, insert the safety filter tab into the positioning slot before pushing the filter into place.



8

Insert the Primary Filter

For end service access models, slide the primary filter into the housing until the gasket seats against the housing. For side service access models, slide the filter down at approximately a 5° angle until it makes contact with the end of the housing. Rotate the filter toward the outlet section to complete the seal.



9

Replace the Service Cover

For end service access models with hinge tabs, insert the hinge tabs into the housing, tilt the service cover into place and secure latches. For end service models without hinge tabs, put the service cover into place and secure the latches. For side-service access models, place the service cover in position and fasten the metal or rubber (PSD14) latches. If the cover doesn't seat, remove and re-check the filter position and access cover orientation.



10

Inspect the Entire Air Cleaner System

Make sure that inlet and outlet connections are in good condition. Torque to and do not exceed 40 in·lb. Replace rubber connectors if necessary and reset the service indicator.





Service Parts & Accessories

D080020, D080026 PSD

Cover (D080020)	P602985 ...3
Cover (D080026)	P601735 ...3
Elbow, 45°	P109331
Elbow, 90°	P114318
Filter, primary	P608533 ...3
Filter, safety	P600975 ...3
Hump hose	P114319
Informer™ indicator 25" H ₂ O	X002277
Latch	P776033 ...3
Outlet band clamp	P148342
Vacuator™ Valve	P158914 ...3

D080056 PSD

Cover	P615530 ...3
Elbow, 45°	P109331
Elbow, 90°	P114318
Filter, primary	P617631 ...3
Filter, safety	P615493 ...3
Hump hose	P114319
Informer™ indicator 25" H ₂ O	X002277
Latch	P776033 ...3
Outlet band clamp	P148342
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P617632 ...3

D090055, D090073 PSD

Cover	P785651 ...3
Elbow, 45°	P105545
Elbow, 90°	P105533
Elbow, 90° reducing	P121482
Filter, primary	P608665 ...3
Filter, safety	P606121 ...3
Hump hose	P105609
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148343
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D090101 PSD

Cover	P786989 ...3
Elbow, 45°	P105545
Elbow, 90°	P105533
Elbow, 90° reducing	P121482
Filter, primary	P608675 ...3
Filter, safety	P606121 ...3
Hump hose	P105609
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148343
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D090120 PSD

Cover	P785651 ...3
Elbow, 45°	P105545
Elbow, 90°	P105533
Elbow, 90° reducing	P121482
Filter, primary	P608665 ...3
Filter, safety	P606121 ...3
Hump hose	P105609
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148343
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D090121 PSD

Cover	P786989 ...3
Elbow, 45°	P105545
Elbow, 90°	P105533
Elbow, 90° reducing	P121482
Filter, primary	P608675 ...3
Filter, safety	P606121 ...3
Hump hose	P105609
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148343
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D100029, D100030, D100072 PSD

Cover	P784279 ...3
Cover, with watertight seal	P619481
Elbow, 45°	P109021
Elbow, 90°	P107844
Elbow, 90° reducing	P143895
Filter, primary	P608666 ...3
Filter, safety	P601560 ...3
Hump hose	P105610
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148345
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D100031, D100032, D100068 PSD

Cover	P784298 ...3
Cover, with watertight seal	P619482
Elbow, 45°	P105547
Elbow, 90°	P105535
Filter, primary	P608676 ...3
Filter, safety	P601560 ...3
Hump hose	P105612
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148347
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D120035, D120036 PSD

Cover	P608171 ...3
Elbow, 45°	P105547
Elbow, 90°	P105535
Filter, primary	P608667 ...3
Filter, safety	P607557 ...3
Hump hose	P105612
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148347
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3

D120037, D120038 PSD

Cover	P608180 ...3
Elbow, 45°	P105547
Elbow, 90°	P105535
Filter, primary	P608677 ...3
Filter, safety	P607557 ...3
Hump hose	P105612
Informer™ indicator 25" H ₂ O	X002277
Latch	P777366 ...3
Outlet band clamp	P148347
U-clip (4 clips)	P784517 ...3
Vacuator™ Valve	P112803 ...3


D140078, D140079 PSD

Cover, with watertight seal	P623026 ...3
Elbow, 45°	P105548
Elbow, 90°	P105536
Elbow, 90° reducing	P215307
Filter, primary	P621983 ...3
Filter, safety	P621984 ...3
Hump hose	P105613
Informer™ indicator 25" H ₂ O	X002277
Latch	P622945 ...3
Outlet band clamp	P148348
U-clip (9 clips)	P622745 ...3
Vacuator™ Valve	P112803 ...3
Gasket	P623192

NOTES:

3 = Shipped with air cleaner initially

Air Filtration for Tier IV Engines



PowerCore®
A Donaldson Filtration Technology

Quality
you expect

Performance
you need

Support
you won't find
anywhere else

**Donaldson
Delivers**

PSD AIR CLEANERS FOR CUMMINS ENGINE APPLICATIONS

Engine Model	Horsepower Range		Engine Size (L)	Speed (CID)	(RPM)	Est. Nom. Airflow CFM	Donaldson Air Cleaner
--------------	------------------	--	-----------------	-------------	-------	-----------------------	-----------------------

Agriculture, Construction/Industrial Equipment

B3.3	74	85	3.3	201	2600	242	PSD08
B3.3	60	65	3.3	201	2600	136	PSD08

Agriculture, Construction/Industrial Equipment, Oil and Gas

QSB3.3	75	110	3.3	201	2200	237	PSD08
QSB4.5	110	160	4.5	275	2200	323	PSD09
QSB6.7	140	300	6.7	409	2200	481	PSD10
QSL9	240	400	9	549	2200	647	PSD10
QSX11.9	300	500	11.9	726	2200	855	PSD12
QSX15	400	600	15	915	2200	1078	PSD14
QSX	375	665	15	915	2000	980	PSD14
QSM	290	400	10.8	659	2000	705	PSD12
QSL	250	365	8.9	543	2000	581	PSD10
QSC	205	305	8.3	506	2100	569	PSD10

Construction/Industrial Equipment, Oil and Gas, Mining

QSK19	506	700	19	1159	2000	1241	PSD14
-------	-----	-----	----	------	------	------	-------

Heavy-duty Truck, RV, Emergency Vehicle

ISX11.9	370	500	11.9	726	2100	816	PSD12
ISX15	455	600	15	915	2100	1029	PSD14

Medium-duty Truck, Bus, Emergency Vehicle

ISB6.7	260	360	6.7	409	2600	569	PSD10
ISC8.3	270	380	8.3	506	2200	596	PSD10
ISL9	345	450	9	549	2200	647	PSD10

On-highway, European, Euro II

ISMe	345	440	10.8	659	1900	670	PSD10
ISLe	350		8.9	543	2100	610	PSD10
ISBe — 6 Cylinder	275	285	6.7	409	2500	547	PSD10

On-highway, European, Euro III

ISMe	335	420	10.8	659	1900	670	PSD10
ISLe	209	260	8.9	543	2100	610	PSD10
ISBe - 4 Cylinder	138	185	4.5	275	2500	367	PSD09
ISBe - 6 Cylinder	285	275	6.7	409	2500	547	PSD10

On-highway, European, Euro IV

ISMe	350	445	10.8	659	1900	670	PSD10
ISLe	280	400	8.9	543	2100	610	PSD10
ISBe - 4 Cylinder	140	207	4.5	275	2500	367	PSD09
ISBe - 6 Cylinder	205	300	6.7	409	2500	547	PSD10

On-highway, European, Euro V

ISMe	350	445	10.8	659	1900	670	PSD10
ISLe	280	400	8.9	543	2100	610	PSD10



Severe Duty Air Induction System Retrofit Kit

1999* – 2003 Ford F250-550 or Excursion with 7.3L Power Stroke® Diesel Engine

Application

1999* – 2003 Ford F250-550 or Excursion with 7.3L Power Stroke® Diesel Engine

Features

This retrofit air induction system kit is ideal for truck owners who operate their vehicle in dirty and dusty conditions and want longer filter service life and improved engine protection.

- Three times or more efficient compared to average Axial pleated or reusable wire mesh filters
- Straight-through airflow delivers powerful performance
- Improved engine protection — no media movement, expansion, contraction or bunching
- Improved contaminant encapsulation — during service the dust and dirt stay contained in the filter
- Installs in 30 – 45 minutes



Kit X007953 includes the air cleaner assembly, filter, duct, battery tray and blanket, fasteners, and installation instructions.

Order Information

Item	Donaldson Part No.	Ford Part No.	Motorcraft Part No.
Air Induction Retrofit Kit	X007953	2U2Z-9K635-AA	FA-1759
Air Filter	P606122	2U2Z-9601-BA	FA-1757

Other Filters for this Ford Vehicle available from Donaldson

Item	Donaldson Part No.	Ford Part No.	Motorcraft Part No.
Fuel Spin-on	P553375	E8TZ-9N184-A	FD-3375, FD-829
Fuel Cartridge	P550437	F81Z-9N184-AA	FD-4596
Lube Spin-on	P550371 P550784	F4TZ-6731-A E3TZ-6731-A	FL-1995 FL-784, FL-784FP

Ford and Power Stroke are registered trademarks of Ford Motor Company.



Complete retrofit installation instructions are included with the X007953 kit (document no. P609001).

* Built after January 1, 1999